


CFR & CFS FORMED VENT PANELS

6-4402

Introducing Continental Disc Corporation's newest additions to their full range of Vent Panels:


The *CFR and CFS Vent Panel*, a Composite Formed RECTANGULAR (CFR) and Composite Formed SQUARE (CFS) vent panel designed to provide instantaneous overpressure protection for dry, bulk handling and storage equipment, such as dust collectors, air scrubbers, sieves, elevators, driers, silos, spreaders and screens.

The CFR and CFS Vent Panels are designed to allow a full and immediate opening to minimize structural or mechanical damage that may be caused by expanding gases. These gas expansions can result from the deflagration* of dust, gases, or mists in equipment, rooms, buildings, or other enclosures.

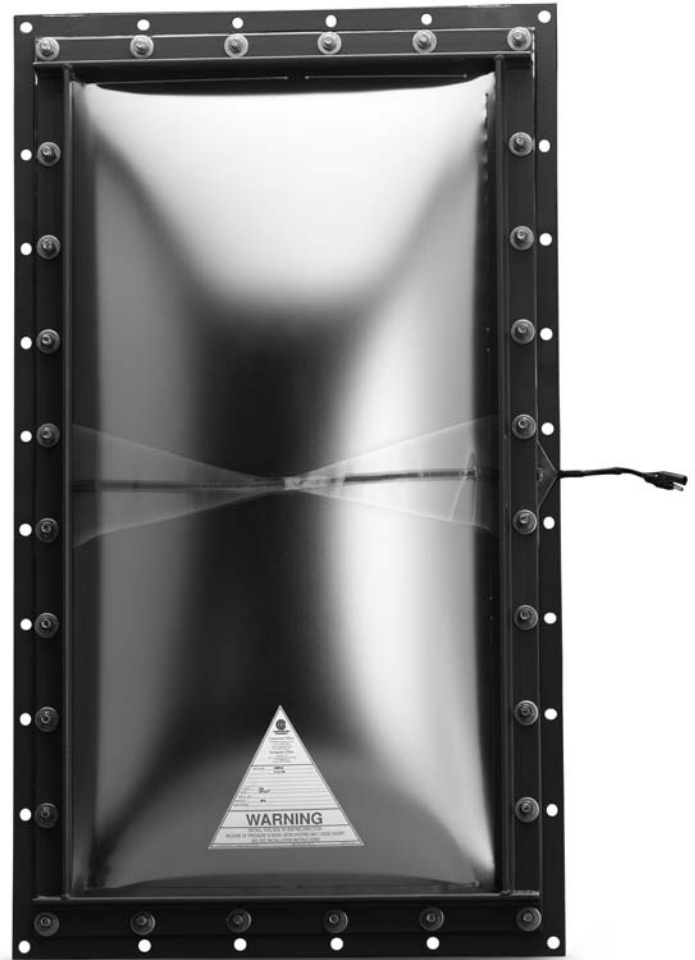

CFR and CFS Vent Panel Features include:

- Operating ratio up to 80% of minimum tagged rating
- Withstands 1-1/2 psig (0,104 barg) vacuum (consult factory for vacuum requirements exceeding 1-1/2 psig)
- Non-fragmenting design
- Burst tolerance $\pm 25\%$ for ratings up to 2 psig (0,14 barg) and ± 0.5 psig (0,035 barg) for ratings above 2 psig (0,14 barg)
- Excellent cyclic service capabilities (pressures going from positive to negative or negative to positive)
- Full instantaneous opening
- Fully opens under dynamic or static pressure conditions
- INTERCHANGEABLE with existing vent panel applications
- Available with Continental Disc Corporation's patented B.D.I.[®] (Burst Disc Indicator) Alarm System (Refer to Bulletin #5-7701-5 for specification details)



**Continental Disc[®]
Corporation**

Performance Under Pressure[®]

A Siegel-Robert Company



* Deflagration as defined under NFPA-68 is: "Burning which takes place at a flame speed below the velocity of sound in the unburned media."
Vent panels are not generally suitable for protection against pressure or shock waves produced from detonation of dust, gases, mists, or explosives.
Detonation as defined by NFPA-68 is: "Burning which takes place at a flame speed above the velocity of sound in the unburned media."

CFR and CFS Specifications

Both the CFR and CFS composite vent panels have a standard material construction of 316 stainless steel top section, TFE Teflon®* seal and 316 stainless steel vacuum support. Each configuration is available in burst pressures from 1.0 psig (0,07 barg) through 10 psig (0.69 barg). Refer to Table I for size and pressure specifications.

Maximum Operating Pressure and Burst Tolerance

The recommended operating pressure for the CFR and CFS Vent Panels is 80%. In addition, CFR and CFS Vent Panels have a burst tolerance of $\pm 25\%$ for burst ratings up to 2 psig (0,14 barg) and ± 0.5 psig (0,035 barg) for burst ratings above 2 psig (0,14 barg). To determine the recommended operating pressure, subtract the burst tolerance from the vent panel's burst rating which establishes the minimum burst pressure, then multiply by 80%.

For example, a CFR or CFS vent panel rated 3.0 psig (0,21 barg) will have a minimum burst pressure of 2.5 psig (0,17 barg) and a recommended operating limit of 1.75 psig (0,12 barg). (Burst rating minus burst tolerance x .80).

Table I – CFR and CFS Vent Panels

Nominal Size		Vent Area		Burst Pressure at 72°F (22°C)			
inches	cm	ft²	m²	minimum		maximum	
				psig	barg	psig	barg
18 x 35	46 x 89	4.01	0,373	1.0	0,07	10.0	0,69
24 x 24	61 x 61	3.67	0,341	1.0	0,07	10.0	0,69
24 x 36	61 x 91	5.58	0,518	1.0	0,07	10.0	0,69
36 x 44	91 x 112	10.44	0,969	1.0	0,07	10.0	0,69

Gaskets

Gaskets are available for both vent panel configurations. Materials include black neoprene, silicone rubber, white FDA-grade rubber, and fiberglass rope. Gaskets are "key locked" together at the corners to assure a leak-tight seal (except on fiberglass). Refer to Table II for temperature limitations.

Table II – Recommended Gasket Temperature Limits

Gasket Material	Maximum Temperature
Black Neoprene	250°F / 121°C
Silicone Rubber	450°F / 232°C
Fiberglass Rope	450°F / 232°C
White FDA Grade Rubber	250°F / 121°C


*Teflon is a registered trademark of E.I. du Pont de Nemours and Company used under license.

Square and Rectangular Framing

Vent panel framing for square and rectangular configurations is available in carbon steel, stainless steel, aluminum, or other specified materials. The outlet frame is typically constructed of 1 1/2" x 1 1/2" x 1/4" carbon steel angle iron, stainless steel angle or aluminum angle. The inlet frame is constructed of flat bar with the vent panel mounting studs permanently attached to the frame. Bolting or welding is used to mount the frame to the structure. Refer to Table III for vent panel frame dimensions.

Table III – CFR and CFS Vent Panel Frames

Nominal Size		Vent Frame Opening Size				Vent Frame Outside Dimensions			
		A		B		L		W	
inches	cm	inches	cm	inches	cm	inches	cm	inches	cm
18 x 35	46 x 89	18	45,7	35	88,9	21	53,3	38	96,5
24 x 24	61 x 61	24	61,0	24	61,0	27	68,6	27	68,6
24 x 36	61 x 91	24	61,0	36	91,4	27	68,6	39	99,1
36 x 44	91 x 112	36	91,4	44	111,8	39	99,1	47	119,4

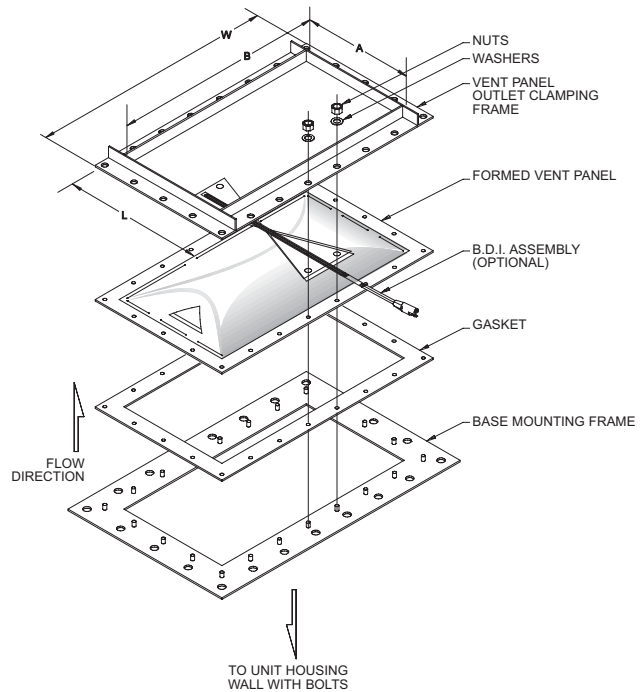

CDC CORPORATE HEADQUARTERS

Continental Disc Corporation
3160 West Heartland Drive
Liberty, Missouri 64068-3385
Phone: + 816-792-1500
Fax: + 816-792-2277
E-mail: pressure@contdisc.com
Website: www.contdisc.com

THE NETHERLANDS

Continental Disc Corporation
Energieweg 20
2382 NJ Zoeterwoude-Rijndijk
The Netherlands
Phone: + (31) 71-5412221
Fax: + (31) 71-5414361
E-mail: cdcnl@contdisc.com

GERMANY

Continental Disc
Deutschland GmbH
Virmondstrasse 151
47877 Willich Germany
Phone: + (49) 2156-490802
Fax: + (49) 2156-492547
E-mail: cdd@contdisc.com

UNITED KINGDOM

Continental Disc UK Ltd.
Unit C, The Business Centre
Faringdon Avenue,
Harold Hill, Romford
Essex RM3 8EN
United Kingdom
Phone: + (44) 1708-386444
Fax: + (44) 1708-386486
E-mail: cduk@contdisc.com

CHINA

Continental Disc Corporation
2026 The Executive Center
20/F The Center
989 Changle Rd.
Shanghai, 200031
P.R. China
Phone: + (86) 21-5117-5848
Fax: + (86) 21-5117-5849
Mobile: + (86) 137-8897-2291
E-mail: jyang@contdisc.com

DUBAI

Continental Disc Corporation
P.O. Box 2234
Dubai, U.A.E.
Phone: + (971) 43214490
Fax: + (971) 43438840
Mobile: + (971) 508129525
E-mail: kannan@contdisc.com